



Electrical Products

POLAR/SOLAR® CORDS


**Lightweight T-Prene Insulated Cordage
That Stays Flexible Under Extreme Conditions**




CSA Certified

Polar/Solar® Cord is the all purpose outdoor cord that always stays light and flexible, even under the most extreme conditions. Polar/Solar® cord will not crack, peel, flake, or bake out even in the most bitter arctic cold. Polar/Solar® maintains total flexibility to -70° C. Rugged T-Prene insulation shrugs off oil, grease, acids, solvents and offers outstanding resistance to abrasion, ozone and other on-the-job hazards. Polar/Solar® Cord weighs 1/3 less than ordinary cord.


Polar/Solar® Extension Cords 300 Volt, Yellow

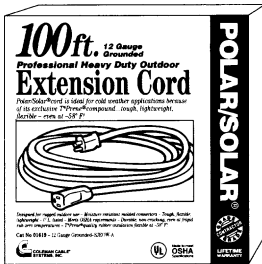


Part No.	Wire GA/Cond.	Length
11417	14/3	25'
11418	14/3	50'
11419	14/3	100'
11617	12/3	25'
11618	12/3	50'
11619	12/3	100'

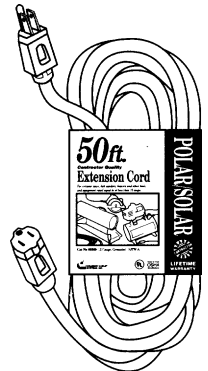

Quadnector™ Polar/Solar® Cords - Four-Way Power Block 300 Volt, Yellow

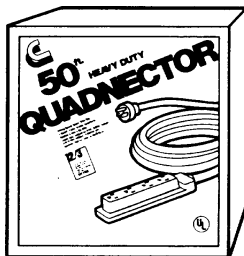

Part No.	Wire GA/Cond.	Length
04412	12/3	6'
04417	12/3	25'
04418	12/3	50'
04419	12/3	100'

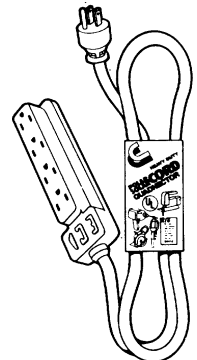

Polar/Solar® Trouble Lights Grounded Metal Guard, Switch, Side Outlet, Yellow

Part No.	Wire GA/Cond.	Length
15857	16/3	25'
15858	16/3	50'





INDUSTRIAL C-CLAMPS



- Made in U.S.A.
- Drop-forged steel frame
- Steel screw, swivel and handle, with copper plate
- Replacement parts available
- Conforms to latest U.S. Government specifications

Part No.	Open Capacity		Min. Throat Depth	Screw Diameter	Weight Each	Min. Test Load
	Max.	Min.				
402	2"	0	2"	1/2"	1 1/4 lbs.	3300 lbs.
403	3"	0	2 3/8"	1/2"	2 lbs.	3500 lbs.
404	4"	0	2 3/4"	3/4"	3 1/2 lbs.	4100 lbs.
406	6"	0	3 5/8"	3/4"	5 lbs.	5400 lbs.
408	8"	0	4 1/2"	3/4"	7 lbs.	5900 lbs.
410	10"	0	5 3/8"	3/4"	10 1/2 lbs.	6200 lbs.
412	12"	0	5 3/4"	7/8"	15 1/2 lbs.	9300 lbs.