



Table of Contents

APPAREL

Coveralls / Bib Overalls	3 & 4
Button-up Shirts	5 & 6
Jeans / Coolworks® Pants	7 & 8
Work Pants and Balaclava Hoods	9 & 10



ARC FLASH

TempTest® Lightweight Arc Flash Suits/Kit	11 & 12
TempTest® Kits/Suits	13 - 22
Accessories	23 & 24



SPECIALTY CLOTHING

Winter Lined Clothing	25 & 26
Flame Resistant Clothing	27 & 28
Leather Clothing	29 & 30
Gold Band® Clothing	31 & 32
Welders Wear® Clothing	33 & 34
Aluminized Clothing	35 - 38



HAND PROTECTION

Aluminized	39
DuPont™ Kevlar® Blend	40 & 41
Cover Mitts	42
DuPont™ Kevlar® Terrycloth	42
High Temperature	43
Driver's & TIG Gloves	44
Welding Gloves	45 & 46



SPECIAL APPLICATION

Protective Clothing	47 - 50
Roll Goods and Welding Blankets	51


































Choose your
FR Protective Apparel based on
**Fabric/Brand, Compliance
or Application**

Fabric/Brand	Compliance
FR7A®	ASTM D 6413
WESTEX Indura®	NFPA 2112 NFPA 70E
WESTEX UltraSoft®	NFPA 2112 NFPA 70E
WESTEX UltraSoft AC®	NFPA 2112 NFPA 70E
WESTEX VINEX®	NFPA 70E
WESTEX® DH	NFPA 2112 NFPA 70E
Nomex® IIIA by Dupont™	NFPA 2112 NFPA 70E
TUFFWELD® by TenCate	NFPA 70E
Dual Mirror Aluminized Fabrics by GENTEX®	NFPA 1971
P.B.I. Gold® by PBI Performance Products	NFPA 1971
100% Wool	N/A
Carbon Felt	N/A
FR Arriva by Stanco	NFPA 2112 ASTM D 6413
FRC Arriva by Stanco	NFPA 2112 NFPA 70E
FRCN Arriva by Stanco	NFPA 2112 NFPA 70E



Stanco has a wide variety of FR Fabrics for Electric Arc and Flash Fire Protection. Whether your preference is color selection, extended wear life, comfort or economic pricing, we have it!

Application	Description & Characteristics
 	Flame resistant 100% cotton, designed for light-duty welding. Will self-extinguish when exposed to flame or thermal ignition sources. Fabric retains flame resistance for up to 50 home washings.
  	A high grade 100% cotton. Flame resistance is guaranteed for the life of the garment.
 	One of the highest levels of quality and protection in an FR cotton fabric. 88% cotton, 12% high tenacity nylon with guaranteed flame resistance for the life of the garment. Superior protection from electric arc and flash fire exposure.
 	Flame-resistant 88% Long-Staple Cotton / 12% High Tenacity Nylon (the long staple cotton gives this fabric a better feel and increased comfort.) is guaranteed for the life of the garment, even in high temperature industrial washings.
 	85% inherently flame-resistant vinyl fiber and 15% polynosic rayon retains FR properties throughout the service life of the garment.
 	A dual hazard fabric that is inherently flame-resistant. A blend of 48% tencel, 40% modacrylic and 12% aramid fibers for outstanding breathability and moisture management to the end of the sentence.
 	Inherently flame-resistant, it can't be degraded by laundering. Garment life is usually 3-5 times that of FR cotton.
	Flame-resistant fabric designed for welding garments. A blend of FR rayon and para-aramid, it provides superior protection with excellent durability and comfort.
  	Available in aluminized Carbon Kevlar®, aluminized Kevlar®, aluminized PFR Rayon and aluminized PBI®.
 	PBI® (polybenzimidazole) and Kevlar®, an inherently flame-resistant fabric, is recommended for firefighters. Lightweight PBI fabric is also used in electric utility and petrochemical applications.
 	Flame-resistant wool provides excellent insulation qualities, is cost-effective and long lasting.
 	High temperature, non-woven material with protection up to 3000 degrees F. Lightweight, durable and scratch-resistant.
 	Flame-resistant 100% cotton, designed for light-duty welding. Will self-extinguish when exposed to flame or thermal ignition sources. Fabric retains flame resistance for up to 50 washings.
 	A higher grade of 100% cotton. Flame-resistant properties throughout the service life of the garment.
 	One of the highest levels of quality and protection in an FR cotton fabric. 88% cotton, 12% high tenacity nylon with guaranteed flame resistance for the life of the garment. Superior protection from electric arc and flash fire exposure.



Flash Fire



Arc Flash



Welding



Molten Metal



High Heat / Abrasion Resistance

ARC
FLASHFLASH
FIRE

APPAREL

Coveralls and Overalls



WELL-DESIGNED
FUNCTIONAL
WORKWEAR

FULL-FEATURED DELUXE STYLE COVERALL

Style FRC686



- Zipper leg openings
- Slanted zip-closure chest pocket
- Reflective tape configuration meets ANSI Class 3
- NFPA 70E CAT 2, ATPV 8 cal/cm²
- NFPA 2112
- Tan, Navy Blue, & Gray

FULL-FEATURED BIB OVERALL

Style 670



- Two front and rear pockets with full bib section pocket
- Elastic take-up shoulder straps

HI-VIS COVERALL

Style US7681HVY2RT4

Westex
UltraSoft®



- NFPA 70E CAT 2, ATPV 8.7 cal/cm²
- ANSI Class 3 High Visibility
- 7 oz. Westex UltraSoft® fabric
- 2" reflective tape
- Elasticized waistband + full-action back
- Concealed YKK® brass zipper
- Six pockets (2 front, 2 rear, 2 pass-through pockets)
- Perforated FR reflective tape for flexibility & breathability

FULL-FEATURED CONTRACTOR STYLE COVERALL

Style 681

Westex
UltraSoft®



DuPont™
Nomex®

Hi-Vis Coverall / Contractor Style

	CAT 2		CAT 2	CAT 2	CAT 2	CAT 2	CAT 1	
Prefix	US		UAC	FRI	FRC	DH	NX	
Fabric	UltraSoft®		UltraSoft AC®	Indura®	100% Cotton, Durable FR	IFR Blend	Nomex® IIIA	
Weight oz/yd ²	9	7	7	9	7	7.5	4.5	6
Arc rating cal/cm ²	12.4	8.7	8.3	11.5	8.0	8.6	4.8	5.7
Royal Blue (RB)	●	●	▲	●	●	▲	●	●
Navy Blue (NB)	●	●	▲	●	●	▲	●	●
Medium Blue (MB)	▲	▲	▲	▲	▲	▲	▲	▲
Tan (TN)	●	●	▲	●	●	▲	●	●
Orange (OR)	▲	▲	▲	●	●	▲	●	●
Gray (GRY)	▲	●	▲	●	●	▲	▲	▲
Red (RD)	▲	▲	▲	▲	▲	▲	▲	▲
Yellow (Y)	▲	▲	▲	▲	▲	▲	▲	▲
Spruce Green (SG)	▲	▲	▲	▲	▲	▲	▲	▲
Black (BK)	▲	▲	▲	▲	▲	▲	▲	▲
Hi-Vis (HVY)	▲	●	▲	▲	▲	▲	▲	▲
Style #	US9681	US7681	UAC7681	FRI681	FRC681	DH7681	NX4681	NX6681
	US9670	US7670	UAC7670	FRI670	FRC670	DH7670	NX4670	NX6670



In-Stock ● Special Order ▲

Sizing chart
on page 53

1-800-348-1148



Stancomfg.com



ARC
FLASH



FLASH
FIRE



WELDING

APPAREL

Deluxe Style Shirts

**STYLISH
STANCO
PROTECTION**



 **Westex**
UltraSoft®

DuPont™
Nomex®

Sizing chart
on page 53

1-800-348-1148



Stancomfg.com

DELUXE STYLE BUTTON-DOWN SHIRT

Style 412



Style 412 features

- Topstitched button-down collar
- Topstitched cuffs with button closure
- Placket front with button closure
- Two large V-point chest pockets with button-down flap closure

CLASSIC STYLE SHIRT

Style 411



Style 411 features

- Topstitched collar
- Topstitched cuffs with button closure
- Button front closure
- Two chest pockets with button-down flap closure

Deluxe Style & Classic Style Work Shirt — Styles 412 & 411

	CAT 2	CAT 2	CAT 2	CAT 2	CAT 2	CAT 1
Prefix	US	UAC	FRI	FRC	DH	NX
Fabric	UltraSoft®	UltraSoft AC®	Indura®	100% Cotton, Durable FR	IFR Blend	Nomex® IIIA
Weight oz/yd²	7	7	9	7	7.5	4.5
Arc rating cal/cm²	8.7	8.3	11.5	8	8.6	4.8
Royal Blue (RB)	▲	▲	▲	▲	▲	▲
Navy Blue (NB)	●	▲	●	●	▲	●
Medium Blue (MB)	▲	▲	▲	▲	▲	▲
Tan (TN)	●	▲	●	●	▲	●
Orange (OR)	▲	▲	▲	▲	▲	▲
Gray (GRY)	▲	▲	▲	▲	▲	▲
Red (RD)	▲	▲	▲	▲	▲	▲
Yellow (Y)	▲	▲	▲	▲	▲	▲
Spruce Green (SG)	▲	▲	▲	▲	▲	▲
Black (BK)	▲	▲	▲	▲	▲	▲
Style #	US7412	UAC7412	FRI412	FRC412	DH7412	NX4412
	US7411	UAC7411	FRI411	FRC411	DH7411	NX4411



In-Stock ● Special Order ▲

ARC
FLASHFLASH
FIRE

WELDING

APPAREL

FR Jeans and Work Pants

Stanco FR jeans with Memory Stretch

The perfect combination of comfort, safety and style is now available. Flame-resistant, CAT 2 Stanco FR jeans offer a modern update to today's discerning workers. 99% virgin cotton with a durable weight of 13.75 oz., they are comfortably suited for most work environments. 8% Memory Stretch Technology allows for ease of movement.

Stanco denim fabric has been washed to achieve a worn look in a deep indigo color.

STANCO FR JEANS

Style FRC1512



Stanco FR jeans feature:

- Two-tone top stitching
- No-rub inside stitching
- Boot cut, relaxed fit
- Lower waist
- Generous 5-pocket design
- Bar-tacked belt loops
- Reinforced stress points
- Double stitched seams
- Durable brass zipper
- Rotational flex-button closing
- Machine washable



NON FR

HEAT
STRESS

HI-VIS

APPAREL

Convertible Work Pants that can feel like Shorts

Coolworks® work pants are designed to relieve heat stress on the job. Using a patented design developed by workers in hot conditions, these convertible, vented work pants provide a cooler, safer, and more comfortable option for industrial workers.

With
Covers Off ►




US patent No.6,968,573



COOLWORKS® PANTS

Style CW2LYRE

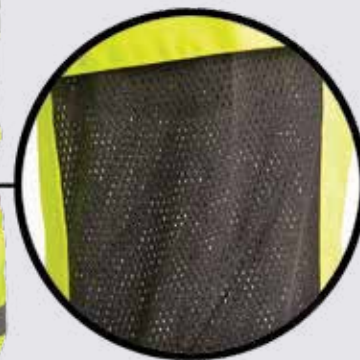

► Meets ANSI/ISEA
107-2015 Class E

COOLWORKS® PANTS

Style CW2NRB



With
Covers On ►

Features

- Multi-use cargo pockets
- Concealed zipper for easy on/off leg covers
- Water/Stain resistant
- Stands up to industrial laundering
- Teflon® coated ripstop fabric
- Tear resistant mesh
- Retro reflective hi-vis striping

Benefits

- Reduced heat stress
- Comfort of shorts
- Protection of long pants
- Relaxed fit
- Increased visibility from reflective material

COOLWORKS®
WORKWEAR

ARC
FLASHFLASH
FIRE

WELDING

APPAREL

Work Pants

CLASSIC STYLE WORK PANTS

Style 511

Sizing chart
on page 53

Features

- Two front swing pockets and two back patch pockets
- Zipper with snap closure

DuPont™
Nomex

DELUXE STYLE WORK PANTS

Style 513

Features

- Two front swing pockets and two back welted pockets
- Zipper with concealed snap closure

Classic Style & Deluxe Style Work Pants — Styles 511 & 513

	CAT 2	CAT 2	CAT 2	CAT 2	CAT 2	CAT 1
Prefix	US	UAC	FRI	FRC	DH	NX
Fabric	UltraSoft®	UltraSoft AC®	Indura®	100% Cotton, Durable FR	IFR Blend	Nomex® IIIA
Weight oz/yd²	9	7	9	7	7.5	6.0
Arc rating cal/cm²	12.4	8.3	11.5	8	8.6	5.7
Royal Blue (RB)	▲	▲	▲	▲	▲	▲
Navy Blue (NB)	●	▲	▲	●	▲	▲
Medium Blue (MB)	▲	▲	▲	▲	▲	▲
Tan (TN)	●	▲	▲	●	▲	▲
Orange (OR)	▲	▲	▲	▲	▲	▲
Gray (GRY)	▲	▲	▲	▲	▲	▲
Red (RD)	▲	▲	▲	▲	▲	▲
Yellow (Y)	▲	▲	▲	▲	▲	▲
Spruce Green (SG)	▲	▲	▲	▲	▲	▲
Black (BK)	▲	▲	▲	▲	▲	▲
Style #	US9513	UAC7513	FRI513	FRC513	DH7513	NX6513
	US9511	UAC7511	FRI511	FRC511	DH7511	NX6511

In-Stock ● Special Order ▲



APPAREL

Balaclava Hoods

Styles NXL777, NXL778, SFRK778, CK778

		CAT 2	CAT 2	CAT 3
Prefix	NXL	NXL	SFRK	CK
Fabric	20% Nomex, 80% Lenzing FR	20% Nomex, 80% Lenzing FR	100% Cotton	Carbon Fiber
Arc rating cal/cm ²	—	10.1	12	35
Navy Blue (NB)	▲	▲	●	▲
White	●	●	▲	▲
Black (BK)	▲	●	▲	●
Style #	NXL777	NXL778	SFRK778	CK778

In-Stock ● Special Order ▲

Style NXL778

DuPont™
Nomex



Style NXL777



Style CK778



Style SFRK778



ARC
FLASH**CAL RATINGS**40 cal/cm²**ARC FLASH****TEMP-TEST®**
ELECTRIC ARC PROTECTION

Lightweight Arc Flash Suit/Kit

MORE PROTECTION IN A LIGHTER WEIGHT

Over 40% Lighter Than Cotton

The combination of an inherently FR blend
5 oz. outer shell, matched with a 6 oz.
liner, makes one of the lightest CAT 4
Arc Flash Suits on the market!



BIB OVERALLS

Style TT44-670



35" COAT

Style TT44-635



HOOD

Style TTK44-712



Sizing chart
on page 53

1-800-348-1148



Stancomfg.com

TempTest Lightweight Arc Flash Kit includes:

- Standard Hood
- 35" Coat
- Bib Overalls
- Hard Hat
- Gear Bag
- Safety Glasses & Ear Plugs

LIGHTWEIGHT ARC FLASH KIT

Style TTK44

Lightweight Arc Flash Kit

	CAT 4
Prefix	TTK
Fabric	NORFAB
TAN	TAN
Style #	TTK44



ARC
FLASH**CAL RATINGS**

8 cal/cm ²	40 cal/cm ²
12 cal/cm ²	83 cal/cm ²
25 cal/cm ²	

Stanco offers protective apparel and accessories that meet:

- NFPA 70E
- 2178 Certified
- ASTM F1506

ARC FLASH

TempTest® Kits & Suits

**TESTED
TRUSTED**

TEMPTEST®

ELECTRIC ARC PROTECTION

When an electric current passes through air between ungrounded and grounded conductors, the temperatures can reach over 25,000°F. Exposure to these extreme temperatures both burn the skin directly and cause ignition of clothing, adding to the burn injury. The majority of hospital admissions due to electrical accidents are from the arc flash burns, not from shock.

Each year more than 2,000 people are admitted to burn centers with severe arc flash burns. Arc flash can kill at distances of 10 ft.

-NFPA 70E Annex K.3



Sizing chart
on page 53



1-800-348-1148
Stancomfg.com

ECONOMY KIT

Style TTEK

See chart on page 15 for:
Fabric, Weight, and Arc Rating

Economy Kit features

- Standard Hood (optional Air Flow Hood available)
See page 21
- 50" Coat
- 15" Knee-Length Leggings
- Hard Hat
- Gear Bag
- Safety Glasses & Ear Plugs

Westex
UltraSoft®



STANDARD KIT

Style TTK

See chart on page 15 for:
Fabric, Weight, and Arc Rating

Standard Kit features

- Standard Hood (optional Air Flow Hood available)
- 35" Coat
- Bib Overalls
- Hard Hat
- Gear Bag
- Safety Glasses & Ear Plugs

Westex
UltraSoft®



Standard for Electrical Safety Employee Workplaces
Table 130.7 (C)(11) Protective Clothing Characteristics

CAT	Clothing Description	Required Minimum Arc Rating of PPE cal/cm²
1	Arc-Rated FR Shirt and FR Pants or FR Coverall and Arc-Rated Face Shield or Arc Flash Suit Hood	4
2	Arc-Rated FR Shirt and FR Pants or FR Coverall and Arc-Rated Flash Suit Hood or Arc-Rated Face Shield and Arc-Rated Balaclava	8
3	Arc-Rated FR Shirt and FR Pants or FR Coverall, and Arc Flash Suit and Arc-Rated Flash Suit Hood selected so that the system arc rating meets the required minimum	25
4	Arc-Rated FR Shirt and FR Pants or FR Coverall, and Arc Flash Suit and Arc-Rated Flash Suit Hood selected so that the system arc rating meets the required minimum	40

NFPA 70E states, "Employees shall wear FR clothing wherever there is a possible exposure to an electric arc flash." This requires employees working on or near energized parts and equipment to wear flame-resistant clothing that meets the requirements of ASTM F1506 and is appropriate to the potential energy of the hazard. Employers are required to perform a flash hazard analysis to determine the potential energy of the hazard and the flash protection boundary.



Standard And Economy Kit Charts

(from previous page)

Standard Arc Flash Kit

	CAT 2	CAT 3	CAT 4	CAT 4
Prefix	TTK	TTK	TTK	TTK
Fabric	UltraSoft®			
Weight oz/yd²	1-Ply 9 oz.	2-Ply 7 oz.	1-Ply 13 oz. 1-Ply 9 oz.	1-Ply 13 oz. 2-Ply 9 oz.
Arc rating cal/cm²	12	25	40	60
Royal Blue (RB)	●	●	●	●
Style #	TTK11	TTK25	TTK40	TTK59

In-Stock ●

Economy Arc Flash Kit

	CAT 2	CAT 3	CAT 4	CAT 4
Prefix	TTEK	TTEK	TTEK	TTEK
Fabric	UltraSoft®			
Weight oz/yd²	1-Ply 9 oz.	2-Ply 7 oz.	1-Ply 13 oz. 1-Ply 9 oz.	1-Ply 13 oz. 2-Ply 9 oz.
Arc rating cal/cm²	12	25	40	60
Royal Blue (RB)	●	●	●	●
Style #	TTEK11	TTEK25	TTEK40	TTEK59

In-Stock ●

Sizing chart
on page 53

1-800-348-1148



Stancamfg.com

Bib Overall Style 670 includes:

- Elastic Take-up Shoulder Strap
- Two Front and Rear Pockets with full Bib Section Pocket

 **Westex**
UltraSoft®

BIB OVERALL

Style 670

Temp Test® Bib Overall

	CAT 2	CAT 3	CAT 4	CAT 4
Prefix	TT	TT	TT	TT
Fabric	UltraSoft®			
Weight oz/yd²	1-Ply 9 oz.	2-Ply 7 oz.	1-Ply 13 oz. 1-Ply 9 oz.	1-Ply 13 oz. 2-Ply 9 oz.
Arc rating cal/cm²	12	25	40	60
Royal Blue (RB)	●	●	●	●
Style #	TT11-670	TT25-670	TT40-670	TT59-670

In-Stock ●



**CAL RATINGS**

8 cal/cm ²	40 cal/cm ²
12 cal/cm ²	44 cal/cm ²
25 cal/cm ²	83 cal/cm ²

ARC FLASH

TEMP TEST®
ELECTRIC ARC PROTECTION

Coats**35" Coat – Style 635****50" Coat – Style 650****Full-Featured Deluxe Style Coats**

- Hook & loop closure
- Knit wrists

Westex
UltraSoft®

Temp Test® 35" & 50" Coats

	CAT 2	CAT 3	CAT 4	CAT 4
Prefix	TT	TT	TT	TT
Fabric	UltraSoft®			
Weight oz/yd ²	1-Ply 9 oz.	2-Ply 7 oz.	1-Ply 13 oz. 1-Ply 9 oz.	1-Ply 13 oz. 2-Ply 9 oz.
Arc rating cal/cm ²	12	25	40	60
Royal Blue (RB)	●	●	●	●
50" Style #	TT11-650	TT25-650	TT40-650	TT59-650
35" Style #	TT11-635	TT25-635	TT40-635	TT59-635

In-Stock ●

**CAL RATINGS**

8 cal/cm² 20 cal/cm²
12 cal/cm² 40 cal/cm²

ARC FLASH

CAT 2 CAT 3 CAT 4

Coverall Arc Flash Kit

**Coverall Arc Flash Kit**

	CAT 2	CAT 2	CAT 3	CAT 4
Prefix	TT	TT	TT	TT
Fabric	UltraSoft®	UltraSoft®	UltraSoft®	UltraSoft®
Weight oz/yd ²	7	9	14	22
Arc rating cal/cm ²	8	12	20	40
Royal Blue (RB)	●	●	●	▲
Navy Blue (NB)	●	●	●	▲
Tan (TN)	●	●	●	▲
Orange (OR)	▲	▲	▲	▲
Gray (GRY)	●	▲	▲	▲
Style #	TT8-681K	TT11-681K	TT20-681K	TT40-681K

In-Stock ● Special Order ▲

Style TT8 681K**The CAT 2 Coverall Kit includes:**

- Westex UltraSoft® Coverall
- Dupont™ Nomex® FR Lenzing Balaclava Hood
- Face Shield with Chin Cup and Slotted Headgear
- Hard Hat
- Gear Bag
- Safety Glasses & Ear Plugs

Westex
UltraSoft®

Available in 8 cal/cm²
and 12 cal/cm²



Custom Craftsmanship Available

Need a customized Arc Flash Garment or Kit in a specific Cal rating? We pride ourselves on our flexibility to get you what you need, when you need it.





FLASH
FIRE



WELDING



ARC
FLASH

CAL RATINGS

8 cal/cm²

12 cal/cm²

ARC FLASH

TEMP TEST®
ELECTRIC ARC PROTECTION

Coverall

**CUSTOM
CRAFTSMANSHIP
AVAILABLE**



FULL-FEATURED CONTRACTOR STYLE COVERALL

Style 681TN


- Elasticized waistband
- Full-action back
- Two-way concealed YKK® brass zipper
- Two front, rear, chest and pass-through pockets



Temp Test® Full-Featured Coverall

	CAT 2	CAT 2
Prefix	US	US
Fabric	UltraSoft®	
Weight oz/yd²	7	9
Arc rating cal/cm²	8	12
Royal Blue (RB)	●	●
Navy Blue (NB)	●	●
Tan (TN)	●	●
Orange (OR)	▲	▲
Gray (GRY)	●	▲
Style #	US7681	US9681

In-Stock ● Special Order ▲

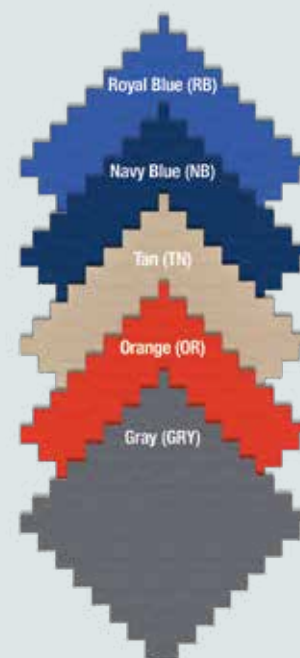

Sizing chart
on page 53

1-800-348-1148



Stancomfg.com

Westex
UltraSoft®



CAL RATINGS

8 cal/cm² 40 cal/cm²
 12 cal/cm² 83 cal/cm²
 25 cal/cm²

ARC FLASH

TEMPTEST®

ELECTRIC ARC PROTECTION

Hood

AIR FLOW HOOD

Style 712


Features:

- 1 or 2-ply Face Shield attached with FR hook & loop
- Accommodates Hard Hat (not included)



Tested and Trusted

The faceshield in the hood was evaluated using ASTM F2178 Standard Test Method for determining the arc rating of face protective products. This method allows for testing face protective products for ignition, melting and burn prediction.



AIR FLOW HOOD

Style 712AF

Features

- 1 or 2-ply Face Shield attached with FR hook & loop
- Accommodates Hard Hat (not included)
- Battery Powered Air Flow System operates for 9 continuous hours
- Dual fans with one blowing in and one blowing out
- Unit is permanently attached to back of hood. Unit is for circulation purposes only, not filtration

Westex
UltraSoft®

TempTest™ Hoods

	CAT 2	CAT 3	CAT 4
Prefix	TT	TT	TT
Fabric	UltraSoft®		
Weight oz/yd ²	1-Ply 9 oz.	2-Ply 7 oz.	1-Ply 13 oz. 1-Ply 9 oz.
Arc rating cal/cm ²	12	25	40
Royal Blue (RB)	●	●	●
Style 712 Part #	TT11-712	TT25-712	TT40-712
Style 712AF Part #	TT11-712AF	TT25-712AF	TT40-712AF

In-Stock ● Special Order ▲

**CAL RATINGS**

55 cal/cm²
31 cal/cm²

ARC FLASH**TRANSVISION SHIELD****Style TV55712**

ATPV rating of 55 cal/cm², CAT 4

ATPV rating of 31 cal/cm², CAT 3

TransVision

SHIELD™

Darkens instantly to protect your eyes

The TransVision Shield™ reacts immediately to an arc flash – darkening instantly to protect against temporary blindness and permanent eye damage.

The washable textile (Style FR-Tex CA 350, Arc-rated) is thermally resistant to destruction or ignition when exposed to intense heat and light.



Clearer Vision

Unlike green tinted face shields that can impair your vision, our uniquely-coated lens lets you see clearly. Colored wires can be easily identified without lifting the visor.

TV 31



TV 31 - rear shroud available.

TV 55



TV 55 has a rear shroud.

ARC
FLASH

ARC FLASH

TEMPTEST®
ELECTRIC ARC PROTECTION

Arc Flash Accessories



DELUXE GEAR BAG

Style GB50

- 28" x 14" x 14" Gear Bag for storing all of your TempTest® Arc Flash clothing and accessories

REPLACEMENT WINDOW

Style SLT712-25



- 1-Ply Replacement Window for Arc Flash Hoods
- Up to 25 cal/cm² applications
- Available for 45 cal/cm² applications (SLT 712-45)

REPLACEMENT WINDOW

Style DPT712-75



- 2-Ply Replacement Window for Arc Flash Hoods
- Up to 75 cal/cm² applications
- Available for 100 cal/cm² applications (DPT 712-100)

FACE SHIELD

Style STS1-20



- Highly Transparent
- True Color Vision
- Fits a Slotted Cap
- Available in 12 cal (STS1-12)
- Available in Full Brim (STS3-20)

BALACLAVA HOOD

Style NXL778



- 20% Nomex®/80% Lenzing FR
- Cat 2, 10.1 cal/cm²

DuPont™
Nomex®

HARD HAT

Style HH75



- Hard Hat with sizing adjustment
- Only available in white



ARC FLASH GLOVES

Style US214WL



- 14" full-cut, wool-lined gloves, 10 oz. ATPV: 76.2

Westex
UltraSoft®

ARC FLASH LEGGINGS

Style TT (series) 25VC



- 15" Leggings with FR hook & loop closure
- Available in 12.4 cal/cm², 21 cal/cm², 40 cal/cm², 51.3 cal/cm², 62.1 cal/cm²

Westex
UltraSoft®

Electrical Glove Kits

Include insulating rubber gloves, leather protectors and glove bag

Glove Kit	Glove Class	Proof Test Voltage A/C	Maximum Use Voltage AC	Length	Size
GK00	00	2,500	500	11", 14"	8 – 12
GK0	0	5,000	1,000	11", 14"	8 – 12
GK1	1	10,000	7,500	14"	8 – 12
GK2	2	20,000	17,000	14"	8 – 12
GK3	3	30,000	26,500	16"	8 – 12
GK4	4	40,000	36,000	18"	9 – 12

Example Style #: Class 0, 11" length, size 10 = RLG011-10

Insulating rubber gloves are necessary for every electrical worker's safety. Leather protectors provide additional protection from cuts, abrasions and punctures. Keep electrical safety gloves in top condition by storing them in the glove bag.

INSULATING RUBBER GLOVES

Style RLG (class, length-size)

- The Insulating Rubber Gloves are ASTM D 120-09 and in service care ASTM F 496-08.
- Gloves are available in sizes 8-12 and 10", 12", 13" and 14" lengths.



LEATHER PROTECTORS

Style LCG (length-size)



- Available in 10", 12", 13" and 14" lengths.

To order the proper leather protector, ASTM specifications require a minimum of 1" per 10,000 Volts between the protector and insulating rubber gloves.

****Note:** At 480 volts, the protector should be 1" shorter than the insulating rubber glove.

Example Style #:

10" length, size 10 = LCG10-10

ARC
FLASHFLASH
FIRE

SPECIALTY CLOTHING

Winter Lined Clothing

Features

- Double-faced FR Modaquilt liner
- Concealed front zipper
- Westex Indura® FR cotton outer shell
- 24" Length



TRACK JACKET

Style FRI624TMQLNB

SURCOAT

Style FRI636TMQLNB

Features

- Zip-out, double-faced FR Modaquilt liner
- Concealed front zipper
- Westex Indura® FR cotton outer shell
- 36" Length



BOMBER JACKET

Style FRI624BJNB

Features

- Sewn-in FR Modaquilt liner
- Concealed front zipper
- DuPont™ Nomex® knit wrist, waistband & collar
- Westex Indura® FR cotton outer shell
- 24" length



SNAP-ON HOOD

Style FRI725NB



- Track jacket and surcoat include an option for the snap-on hood. (sold separately)

COVERALL**Style FRI681LNB****Features**

- Concealed zipper front closure
- Slanted zipper pockets
- Two side and rear pockets
- Set-in knit wrist sleeve openings
- 27" zipper legs

DuPont™
Nomex®

BIB OVERALL**Style FRI671LNB****Features**

- Slanted zipper pockets
- Two Side and rear pockets
- Double-ply knees
- Hook & loop ankle adjustments
- 42" zipper legs

Stanco's Winter Lined Clothing is available in a 9 oz. Westex Indura® or 6 oz. DuPont™ Nomex® outer shell with an FR quilted liner. Call customer service for color availability. Style numbers shown are for Westex Indura®.

 **Westex
Indura®**

Sizing chart
on page 53

1-800-348-1148



Stancomfg.com



WELDING

HIGH HEAT
ABRASION
RESISTANCEAmerican Welding
Society Member

SPECIALTY CLOTHING

Flame Resistant 100% Cotton Clothing

9 oz. FR Green 100% Cotton Clothing
is also available in 11 oz. Twill



COVERALL

Style FR681

18" SLEEVES

Style FR18ECEC



Features

- Dual elastic cuffs
- Available in 23"

18" SLEEVES

Style FR18E



Features

- Dual elastic cuffs
- Available in 23"

HARD CAP LINER

Style FR770VC



Features

- Hook & loop closure
- Fits inside hard cap suspension
- 8" Veil

WORK PANTS

Style FR511



Features

- Zipper closure
- 2 front/rear pockets

HARD CAP SHROUD

Style FR1229EB



Features

- 12" X 29"
Expandable elastic band

Sizing chart
on page 531-800-348-1148
Stancomfg.com

BIB OVERALL**Style FR670****Features**

- 2 front/2 rear pockets
- Breast pocket
- Riveted seams

36" BIB APRON**Style FR36B****Features**

- Available with a 24" X 18" leather patch (FR36BP)

SPLIT LEG APRON**Style FR48SL****Features**

- 24" X 48" cotton ties

24" WAIST APRON**Style FR24W****Features**

- 24" X 24" cotton ties

30" JACKET WITH COLLAR**Style FR630****Features**

- Inside pockets

JACKET WITH FULL LEATHER SLEEVE**Style FR630LS****Features**

- Inside pockets

CAPE SLEEVE WITH 20" BIB**Style FR601-20****Features**

- Available with 14" Bib (FR601-14)
- Cape Sleeve may be purchased separately (FR601)

CLASSIC STYLE SHIRT**Style FR411****Features**

- Topstitched collar
- Topstitched cuffs/button closure
- Button front closure
- 2 chest pockets/button down flap closure

45" LAB COAT**Style FR645****Features**

- 2 outside pockets
- Breast pocket
- Snap front closure



WELDING

HIGH HEAT
ABRASION
RESISTANCEAmerican Welding
Society Member

CAPE SLEEVE WITH 20" BIB

Style L2601-20

SPECIALTY CLOTHING

High-Quality Leather Welder's Clothing

Leather is the very best material for welder's protective clothing. Stanco's leather clothing is made from side-split cowhide, offering maximum protection.



Features

- Available with a 14" Bib (L2601-14)
- Cape Sleeve may be purchased separately (L2601)
- Bibs may also be purchased separately (L220 and L214)

30" JACKET WITH COLLAR

Style L2630



Features

- Generous fit
- Sewn with Kevlar® thread
- Double lock-stitched seams
- Riveted stress points

Sizing chart
on page 53

1-800-348-1148



Stancofmg.com

DuPont™
Kevlar®

BOOT SPATS

Style LS35, LS37, LS37VC



LEGGING WITH BOOT SPAT

Style L25VC, L25, L27



WAIST APRON**Style L224W****Features**

- 24" x 24"
- Available in 24" x 18" (L218W)

SPLIT LEG APRON**Style L236SL****Features**

- 24" x 36"
- Available in 24" x 42" (L242W) or 24" x 48" (L248W)

BIB APRON**Style L236B****Features**

- 24" x 36"
- Available in 24" x 42" (L242B), 24" x 48" (L248B), or 24" x 52" (L252B)

23" SLEEVES**Style L223****Features**

- Adjustable straps
- Available in 18" length (L218)

PANTS**Style L2511****Features**

- Belt loops
- Snap fly
- Waist sizes 34" - 48"

WAIST CHAPS (COWBOY) STYLE**Style L2505****Features**

- Adjustable straps



WELDING

HIGH HEAT
ABRASION
RESISTANCEAmerican Welding
Society Member

CAPE SLEEVE WITH 20" BIB

Style GB2601-20

SPECIALTY CLOTHING

Gold Band™ Leather Welder's Clothing

Offers maximum protection,
along with value pricing.



Features

- Available with a 14" Bib (GB2601-14)
- Cape Sleeve may be purchased separately (GB2601)

30" JACKET WITH COLLAR

Style GB2630



Features

- Generous fit
- Sewn with Kevlar® thread
- Double lock-stitched seams
- Riveted stress points

DuPont™
Kevlar.



SPLIT LEG APRON**Style GB236SL****Features**

- 24" x 36"
- Available in 24" x 42" (GB242SL) or 24" x 48" (GB248SL)

BIB APRON**Style GB236B****Features**

- 24" x 36"
- Available in 24" x 42" (GB242B) or 24" x 48" (GB248B)

WAIST CHAPS (COWBOY STYLE)**Style GB2505****Features**

- Adjustable straps

18" SLEEVES**Style GB218****Features**

- Available in 23" length (GB223)
- Adjustable Straps

ROD BAG**Style GB275****Features**

- 14" leather leggings

14" LEGGINGS**Style GB24****6" SPATS****Style GB32****Features**

- 6" leather spats

Sizing chart on page 53

1-800-348-1148



Stancomfg.com



WELDING

HIGH HEAT
ABRASION
RESISTANCEAmerican Welding
Society Member

CAPE SLEEVE WITH 20" BIB

Style W601-20

SPECIALTY CLOTHING

Lightweight Welder's Wear®

Stay cool and comfortable with lightweight, flame-resistant Welder's Wear®, made with 12 oz. 100% cotton twill.

HALF THE COST OF LEATHER



Features

- Available with 14" Bib (W601-14)
- Cape Sleeves may be purchased separately (W601)
- Bibs may also be purchased separately

JACKET WITH FULL LEATHER SLEEVES

Style W630LS



Features

- Full leather sleeves
- Inside pocket

30" JACKET WITH COLLAR

Style W630



Features

- Inside pocket

CAPE WITH FULL LEATHER SLEEVES**Style W601LS-20****Features**

- Same features as W601-20, except comes with full leather sleeves

45" LAB COAT**Style W645****Features**

- Two outside pockets
- One breast pocket

18" SLEEVES WITH ELASTIC CUFFS**Style W18ECEC****Features**

- Available in 23" length (W23ECEC)

COVERALL**Style W681****Features**

- Front, rear and breast pockets
- Zipper front closure

48" SPLIT LEG APRON**Style W48SL****Features**

- Available with 24" x 18" Belly Patch

Sizing chart on page 53

1-800-348-1148



Stancomfg.com

BIB APRON WITH BELLY PATCH**Style W36BP****Features**

- 24" x 36" Apron
- 24" x 18" Belly Patch
- Available without Belly Patch (W36B)

BIB OVERALL**Style W670****Features**

- Front, rear and breast pockets
- Double knee
- Elastic shoulder straps
- Riveted seams



WELDING

HIGH HEAT
ABRASION
RESISTANCEMOLTEN
METAL*American Welding
Society Member***SPECIALTY CLOTHING**

Aluminized Combination Clothing

High Temperature Hand & Body Protection

Stanco's Hi-Temp Gloves, Mitts and Protective Clothing have been designed for maximum protection in the most adverse work conditions. Steel mills, foundries and casting operations, to name a few, have job applications that require hand and body protection for temperatures exceeding 2,000°F. Special aramid fabrics, heavy linings and full cut patterns in a variety of designs are available in this line. All styles sewn completely with heavy Kevlar® thread.

What Kind of Heat is it?

It is important to understand the types of heat in order to select the proper gloves and clothing for protection.

Radiant: Generated by a heat source. An example would be a fireplace or the sun. The materials being struck absorb the heat's rays (it's hotter standing in the sun than in the shade).

Ambient: The surrounding atmospheric temperature in a particular environment. Example: 72°F in your home; 92°F on the golf course in July; 1,800°F in a flaming building.

Conductive: Direct contact with hot surfaces. Example: touching a hot piece of metal at 800°F or leaning against a heat treating oven at 1,000°F.

Sizing chart
on page 53



40" COMBINATION COAT**Style APB640RFR****Coat Features**

- Concealed front snap closures with leather pull-tabs
- Stand-up collar

COMBINATION PANTS**Style APB511RFR****Coat & Pants Features**

- 8 oz. Aluminized P.B.I.® fabric
- Lock-stitched
- DuPont™ Kevlar® sewn
- 9 oz. FR green cotton, snap-out, moisture wicking, hygienic liner – machine washable
- Garments are available in:
 - Aluminized Rayon (AR)
 - Aluminized Kevlar® (AK)
 - Aluminized Carbon Kevlar® (ACK)
 - Aluminized P.B.I.® (APB)

DuPont™
Kevlar.

45" REVERSE ENTRY COAT**Style AR645SG****Features**

- Closed front
- Open back
- Reverse-entry coat

30" ALUMINIZED RAYON COAT**Style AR630****Features**

- Concealed front snap closures with leather pull-tabs
- Lock-stitched
- DuPont™ Kevlar® sewn
- Stand-up collar
- Available in:
 - 35" (AR635), 40" (AR640), 50" (AR650) Lengths

DuPont™
Kevlar.

Prefix	Material	Characteristics
AR	Aluminized PFR Rayon, 16 oz.	Good reflectivity & radiant heat protection. Economical, low burn-through resistance
APB	Aluminized PBI, 8 oz.	Lightweight and good reflectivity, low burn-through resistance
AK	Aluminized Kevlar®, 17 oz.	Moderate burn-through resistance, excellent against most acids, Reflects well against radiant heat
ACK	Aluminized Carbon Kevlar®, 17 oz.	Excellent burn-through resistance, lightweight and flexible



WELDING

HIGH HEAT
ABRASION
RESISTANCEMOLTEN
METALAmerican Welding
Society Member

SPECIALTY CLOTHING

Aluminized Combination Clothing

Shown are the most popular fabrics and weights. Numerous fabrics and weights are available.

SPLIT LEG APRON (24" X 42")

Style AR42SL

Available in:

- 24" x 48" (AR48SL)



BIB APRON (24" X 48")

Style AR48B



Available in:

- 24" x 30" (AR30B)
- 24" x 36" (AR36B)
- 24" x 42" (AR42B)

CAPE SLEEVE WITH DETACHABLE 14" BIB

Style AR601-14



Available:

With 20" Detachable Bib (AR601-20)"

SHROUD (13" X 29")

Style AK1329VC



HOOD WITH WINDOW

Style AK710



- 7" x 11" Window
- Gold lens for full face, head and shoulder protection

BOOT COVERS

Style AK39



- Designed to slip over shoes
- Insulated
- Non-Skid heat resistant sole
- Other sole options available

18" SLEEVES

Style AR18E



- Sleeves feature elastic at both ends
- Available in 23" (AR23E)

DELUXE SPAT

Style AR37



- Elastic top
- Metal stays

CHAPS (24" X 39")

Style AR505

Rear View

- Open back
- Adjustable belt and leg strap



40" SLIP-ON LEGGINGS

Style AR506

Rear View

- Interchangeable for either leg
- Flare and belt fastener



REPLACEABLE SPRING-TYPE LEGGING

Style AR27



SPRING-TYPE LEGGING

Style AR25



- Knee length
- Side-bars for support
- Snap closure

Sizing chart on page 53

1-800-348-1148



Stancomfg.com

Hand Protection Fabrics: How Much Heat will they take?

A good and often asked question for hand protection fabrics. The information note below is to be used as a guide only. The work environment and area of intended use should be checked for: Weight of items being handled; Temperature (contact) and Time. Consult our customer service department or your factory sales representative.

HAND PROTECTION

Special Application Gloves & Mitts

Material	Product Prefix	Maximum Temperature Range	Abrasion Resistance
22 oz. Kevlar® Blend	K	1,000°F	3
Kevlar® Terrycloth	TK	1,000°F	4
8 oz. Kevlar® Twill, 100% Kevlar®	KT	900°F	4
Leather, Cowhide Split	L	450°F	5
Kevlar® / PBI Blend, 22 oz.	KP	1,350°F	3
Kevlar® / PBI Blend, 45 oz.	HKP	2,000°F	3
Fiberglass, 36 oz., coated	HG	2,000°F	3
Fiberglass, 24 oz.	G	1,000°F	2

Example Part#: Class 0, 11" length, size 10 = **RLG011-10**

Special Aramid for use
in Gloves and Mitts offers
MAXIMUM PROTECTION
against heat and
abrasive wear.

Kevlar® Gloves & Mittens

14" KEVLAR® GLOVE

Style K214WL

- Made from 22 oz. Kevlar® Blend material, safety yellow color and full wool lined
- All styles are extra large cut and sewn with 100% Kevlar® thread
- 1,000°F Max Temperature Range
- Available in 18"

DuPont™
Kevlar.

**BEST
SELLING
KEVLAR
GLOVE**

14" KEVLAR® GLOVE WITH LEATHER

Style K214LWL

Features

- Palm, thumb, & fingers are leather reinforced

23" KEVLAR® GLOVE

Style K223WL

Available in:

- 18" (K218WL) • 14" (K214WL)
- 11" (K211WL)

SLIP-OVER GLOVE COVER

Style K308GC

Features

- Extra Protection from heat and abrasive wear
- 22 oz. Kevlar® Blend fabric

Aluminized & Aluminized Combination Gloves

14" ALUMINIZED RAYON GLOVE

Style AR214WL



Features

- Made from heat-resistant aluminized fabrics for radiant heat protection. All styles are fully wool lined and sewn with Kevlar® thread

14" ALUMINIZED CARBON KEVLAR® GLOVE

Style ACKK214WL



Features

- Palm and inside cuff are made from 22 oz. Kevlar® Aramid. Back of glove, cuff and thumb are made from Aluminized Carbon Kevlar®
- Available in 18" & 23"

Kevlar® Gloves & Mittens

15" REVERSIBLE KEVLAR® MITTEN

Style K714QWL



Features

- Wide cuff opening
- 5-Ply protection
- Quilted palm
- Wool lined

14" REVERSIBLE KEVLAR® MITTEN

Style K514QWL

GLASSHANDLER'S
DESIGN



14" REVERSIBLE KEVLAR® MITTEN

Style K314WL



Fiberglass® Gloves & Mittens

2,000° F Max Temperature Range

14" FIBERGLASS GLOVE

Style G214WL



Features

- Made from 24 oz. textured fiberglass material, coated to allow maximum wear and protection. All styles are yellow in color, full wool lined, and sewn with Kevlar® thread.

14" FIBERGLASS GLOVE

Style G214LWL



Features

- Palm, thumb, and fingers are leather reinforced

14" REVERSIBLE FIBERGLASS MITTEN

Style G314WL



14" REVERSIBLE HEAVY FIBERGLASS MITTEN

Style HG414SP

Features

- 36 oz. Heavy Fiberglass
- 3-Ply Wool/Nomex® combination liner
- 5-Ply total protection
- Product #HG310CMJ Slip-Over Cover Mitten is recommended for maximum protection

DuPont™
Kevlar.



HAND PROTECTION

Special Application Gloves & Mitts

STANCO offers a complete line of Gloves, Mitts, and Pads for high temperature hand protection. Many other styles are available.

Ask your customer service representative.



Kevlar® /PBI Gloves & Mittens

Made from 22 oz. ceramic and DuPont™ Kevlar® material — the best combination for high-temperature hand protection. All styles are fully wool lined, extra large cut, and sewn with 100% DuPont™ Kevlar® thread.

14" PBI/KEVLAR® BLEND GLOVE

Style KP214DWL



Features

- 1,350°F max temperature range

14" REVERSIBLE PBI/ KEVLAR® MITTEN

Style KP314DWL



Features

- Double quilted palm
- 4-ply protection

14" KEVLAR®/PBI GLOVE

Style HKP214DWL



Features

- 45 oz. of PBI/Kevlar® material
- Double wool lined
- Jumbo cut
- Protection to 2,000°F for short durations

14" KEVLAR®/PBI MITTEN

Style HKP314DWL



Features

- 45 oz. of PBI/Kevlar® material
- Double wool lined
- Jumbo cut
- Protection to 2,000°F for short durations

Kevlar® Gloves & Mittens

Made from heavyweight Kevlar® terrycloth material. All styles are wool lined for excellent insulation. 1,000°F max temperature range.

14" KEVLAR® TERRYCLOTH GLOVE

Style TK214KCWL



Features

- Woven Kevlar® cuff

14" KEVLAR® TERRYCLOTH GLOVE

Style TK214WL



Features

- All terrycloth construction

14" KEVLAR® TERRYCLOTH REVERSIBLE MITTEN

Style TK314KCWL



Features

- Woven Kevlar® cuff

14" KEVLAR® TERRYCLOTH REVERSIBLE GLOVE

Style TK214RKCWL



Features

- Woven Kevlar® cuff

Cover Mitts

Unlined 10" slip-over cover mitts are for extra protection against heat and abrasive wear.

HEAVYWEIGHT FIBERGLASS

Style HG310CMJ



JUMBO
COVER MITT

22 OZ. KEVLAR®

Style K310CMJ



JUMBO
COVER MITT

22 OZ. KEVLAR®/PBI

Style KP310CMJ



JUMBO
COVER MITT

22 OZ. KEVLAR®/PBI

Style K310CM



COVER
MITT

(for 314 reversible mitt)

1-800-348-1148

Stancomfg.com

HAND PROTECTION

Special Application Gloves & Mitts



High-Temp Gloves

High-temp leathers and fabrics for all weather conditions and rugged applications.

Style G450KW

Features

- Domestic green welding glove
- Fully lined
- 100% 2-Ply Kevlar® knit wrists may be attached to any welding glove to prevent slag and sparks from entering cuff.



Style ARTH7517WL

Features

- Aluminized back with brown thermoleather palm, "scarfing" glove
- Reinforced palm and knuckle strap
- Wool lined
- 17" length
- Flared cuff opening with hook & loop closure for extra arm protection
- Size: L



Style TH22XFWL

Features

- Imported heavyweight brown thermoleather
- Clute pattern
- Fully lined with heavyweight wool
- 15" length
- 3/4" thumbstrap and pulse patch
- Size: L



TIG Welding Gloves

Style 2102

Features

- Grain Doeskin (Capeskin)
- 4" Split leather cuff
- Gunn pattern
- Straight thumb
- Size: S-XL



Style 2107

Features

- Doeskin palm and side-split cowhide back
- Cowhide cuff



Style 2101

Features

- Grain Doeskin (Capeskin)
- 2" Split leather cuff
- Gunn pattern
- Straight thumb
- Size: S-XL



Style 2104

Features

- Deer split leather
- 4" cowhide cuff
- Gunn pattern
- Straight thumb
- Unlined
- Size: S-XL



Style 2103

Features

- Deer split leather
- 2" cowhide cuff
- Gunn pattern
- Straight thumb
- Unlined
- Size: S-XL



Style 2106

Features

- Grain pigskin
- Gunn pattern
- Sewn with Kevlar® thread
- Woven Kevlar® cuff



Driver's Gloves

Style 220E

Features

- Gold elkskin
- Elastic wrists
- Size: S-XL



Style 2052

Features

- Grain cowhide palm
- Split cowhide back
- Elastic wrists
- Size: S-XL



Style 2054

Features

- Grain cowhide, slit leather back
- Elastic wrists
- Size: S-XL



HAND PROTECTION

Special Application Gloves & Mitts

Made with top-grade select side & shoulder split leathers. All Stanco® welding gloves are sewn with DuPont™ Kevlar® thread.



Style 2020

Features

- Wide thumbstrap • Wing thumb
- Foam lined • Size: L

Style 2002



Features

- Wide thumbstrap
- Straight thumb • Pulse patch
- Foam lined • Size: L

Style 2017



Features

- Sized for the smaller hand
- Fleece/cotton lined • Wing thumb
- Weltd seams • Size: M

Style 300AR



Features

- Aluminized rayon back and thumb to reflect radiant heat
- Cowhide palm
- Fleece lined • Size: L

Style 300ARF-3BP



Features

- Aluminized rayon back welding glove
- Wool lined • Aluminized snap-on pad, 7 1/2" x 9 1/2" • Pad may be ordered separately under part # 3BP
- Glove may be ordered separately



High-Quality Welding Gloves

Style 2007



Features

- Wide thumbstrap • Wing thumb
- Foam lined • Size: L

Style 2010



Features

- Wide thumbstrap • Wing thumb
- Foam lined • Size: L

Style 2012



Features

- Wide thumbstrap
- Wing thumb • Foam lined
- Size: L

Style 2018



Features

- Wide thumbstrap • Wing thumb
- Fleece lined • Welted seams
- Size: L

Style 2025



Features

- Pearl grey with black welting
- Wing thumb • Cotton/fleece lined
- Size: L

Style 450-18



Features

- Wide thumb • Welted seams
- Cotton/fleece lined • 18" length
- Size: L

Style 750



Features

- Elkskin welding glove • Insulated back with unlined palms
- Welted seams with thumbstrap • Size: S-XL

Style 850



Features

- Gold elkskin welding glove • Insulated back with unlined palms
- Welted seams with thumbstrap
- Size: S-XL

Style 757



Features

- Elkskin welding glove • Seamless index
- Double palm to Index • The pipeliner welding glove
- Unlined for dexterity
- Pulse patch on cowhide cuff
- Size: S-XL



HIGH HEAT
ABRASION
RESISTANCE



MOLTEN
METAL



CUT
RESISTANT

SPECIAL APPLICATION

Protective Clothing

Great for handling glass!

BIB APRON

Style KTW36B



Features

- 24" x 36" bib apron
- 100% Kevlar® twill
- Cut-resistant

DuPont™
Kevlar.

SURGICAL STYLE GOWN

Style KTW624GR-27



Features

- Reverse-Entry Gown
- 1-Ply, 100% DuPont™ Kevlar® twill
- Aluminum eyelets provide ventilation and protection
- Fabric weight 8.5 oz./yd²
- Sleeve lengths: 23", 25", 27", 29", 31", 35", 37"
- Cut-resistant

23" SLEEVE

Style KTW23E



Features

- Dual elastic
- 100% DuPont™ Kevlar® twill
- Available in 18" (KTW18E)
- Cut-resistant

SPLIT-LEG WAIST APRON

Style K2426SLVC



Features

- 24" x 26"
- Snaps to KTW624GR gown
- Cut-resistant

30" COAT

Style KTW630




Features

- 100% DuPont™ Kevlar®/Aramid twill
- Unlined
- Fabric weight 8.0 oz./yd²
- Cut-resistant

DuPont™
Kevlar.

9" WRISTLET

Style KTW9VC



Features

- Available in 7" (KTW7VC)
- Wristlet with thumb slot and Hook & Loop closure
- 2-Ply, DuPont™ Kevlar®
- Sizes S-XL
- Cut-resistant

KEVLAR®/ARAMID BELLY PATCH

Style K1816PVC



Features

- 18" x 16"
- Hook & loop attachment
- Cut-resistant

Eyelet Ventilated Sleeves

Sleeves are Superior for Glass Worker Protection

KEVLAR® SLEEVE

Style KTW31GR



Features

- 1-Ply, 100% DuPont™ Kevlar® twill
- 8 oz.
- Available in 33" & 29"
- Cut-resistant

CANVAS SLEEVE

Style CD2P31



Features

- 2-Ply, 9 oz. canvas fabric
- Non-FR
- Available in 33" & 29"

FR GREEN COTTON

Style FR2P31GR



Features

- 2-Ply, 9 oz. FR green cotton
- Available in 33" & 29"

Tuffweld® Protective Welding Clothing

Superior resistance to metal splatter and pin-holing. 20% lighter than FR cotton. Provides exceptional wicking capability. A lightweight blend of Kevlar® and Lenzing™ FR rayon.

DuPont™
Kevlar®

BIB APRON

Style TW8630



Features

- 24" x 36" bib apron

30" COAT

Style TW8630B



Features

- 30" Coat with collar and inside pocket

CAPE SLEEVE

Style TW8601



Features

- Cape sleeve with collar and snaps
- Bib not included

18" SLEEVES

Style TW818E



Features

- 18" Sleeves with elastic on both ends

20" BIB

Style TW820



Features

- 20" bib for TW8-601
- Available in 14" (TW8-14)



SPECIAL APPLICATION

Protection

Chain Saw Chaps

Our chain saw chaps are made from multi-layered DuPont™ Kevlar® with a Cordura® outer shell. The inner pad is designed to clog and block the cutting chain to keep you safe. Additional protection is provided if pad material is pulled into the drive sprocket.



CHAIN SAW CHAPS

Style KCN511-28




Features

- 28" Length Chap
- Available in 32" (KCN511-32), 36" (KCN511-36), 40" (KCN511-40)
- 6-Ply Protection

Miscellaneous Specialized Clothing


2-Ply 100% DuPont™ Kevlar® knit material. Cut and burn resistant with good shape memory after repeated use.



Style KK10

Features

- 10" Sleeves
- Available in: 14" (KK14), 16" (KK16), 18" (KK18)

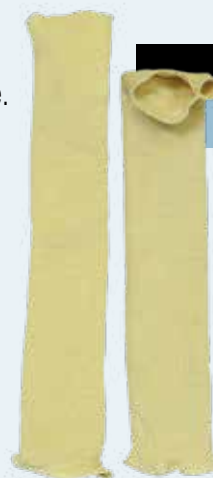

Style KK18TS

Features

- 10" Sleeves
- Available in: 14" (KK14), 16" (KK16), 18" (KK18)

Available without Thumbslot.

2-Ply Nylon Cane Mesh Sleeves

Style CMW9VC

Features

- 9" Sleeves
- 2-Ply Protection with Hook & Loop closure
- 9" Black (CMB9VC), 7" Black (CMB7VC), 7" White (CMW7VC)



Style CMW23ADJ

Features

- Full Arm Protection
- 2-Ply Soft Nylon Mesh
- 23" Length with Adjustable Elastic



Miscellaneous Specialized Clothing

Other garments are available in Vinex® material

Style FR9681



Features

- Coverall 8.5 oz. Vinex® blend fabric
- Cat 2 protection from molten aluminum splash

 **Westex**
Vinex®

Style AL14630



Features

- 30" unlined coat with inside pocket
- 100% treated 14 oz. cotton denim
- Protection from molten aluminum splash

Style ORFR624VRT



Features

- FR cotton vest with reflective tape 18" (KK18)

Deluxe Respirator Bags

Deluxe respirator bags are sewn with Dupont™ Kevlar® thread to provide maximum durability.

DuPont™
Kevlar®

Style VRB774B



Features

- 7" x 7" x 4" vinyl respirator bag
- Flame/moisture/chemical resistant

Style VRB774Y



Features

- 7" x 7" x 4" vinyl respirator bag
- Flame/moisture/chemical resistant

SPECIAL APPLICATION

How to Order a Welding Blanket:

Example: Fiberglass Blanket,
18 oz., 6' X 6', White

Material	Material Weight	Blanket Size	Color
G	18	66	W

G1866W

Resulting Part Number

Material Codes

G, FiberGlass

SI, Silica

CF, Carbon Felt

Color Codes

W, White

Y, Yellow

R, Bull Dog Red

OR, Orange

B, Bronze (Silica) or

Black (Carbon Fiber)



Available in a variety of flame and heat resistant materials to fit a variety of applications. All hems are turned and double stitched with 100% heavy Kevlar® thread. Grommets are spaced on 24" centers and 3/8" O.D. brass plated

Roll Goods


Part #	Material	Weight: Ounce/Sq. Yd.	Roll Width	Characteristics
G1840W	Fiberglass	18 oz.	40" x 50 yds.	1,000°F Melt Temp; Light-Duty; Vertical Plane Protection Only; White Color
G1860W	Fiberglass	18 oz.	60" x 50 yds.	1,000°F Melt Temp; Light-Duty; Vertical Plane Protection Only; White Color
G2440Y	Neoprene-coated Fiberglass	24 oz.	40" x 50 yds.	1,000°F Melt Temp; Medium Heavy-Duty; Abrasion, Spark, and Splatter Resistant; Yellow color
G2460Y	Neoprene-coated Fiberglass	24 oz.	60" x 50 yds.	1,000°F Melt Temp; Medium Heavy-Duty; Abrasion, Spark, and Splatter Resistant; Yellow color
G1638R	Acrylic-coated Fiberglass	16 oz.	38" x 50 yds.	1,000°F Melt Temp; Light-Duty; Oil, Water, and Abrasion Resistant; Bull Dog Red Color
G1660R	Acrylic-coated Fiberglass	16 oz.	60" x 50 yds.	1,000°F Melt Temp; Light-Duty; Oil, Water, and Abrasion Resistant; Bull Dog Red Color
G3240OR	Fiberglass	32 oz.	40" x 50 yds.	1,200°F Melt Temp; Heavy-Duty; General Purpose Welding; Orange Color
SI-1836B	Silica	18 oz.	38" x 50 yds.	3,000°F Melt Temp; Heavy-Duty; Slag & Molten Metal; Bronze Color
CF-1700B	Carbon Felt	17 oz.	60" x 50 yds.	Protects to 3,000°F; Heavy-Duty, Scratch-Resistant; Black Color

— Minimum order quantities apply to all custom orders —

Prompt shipment nationwide from Atlanta, TX

Fax orders to: 903-796-9237

Email us: CustomerService@StancoMFG.com

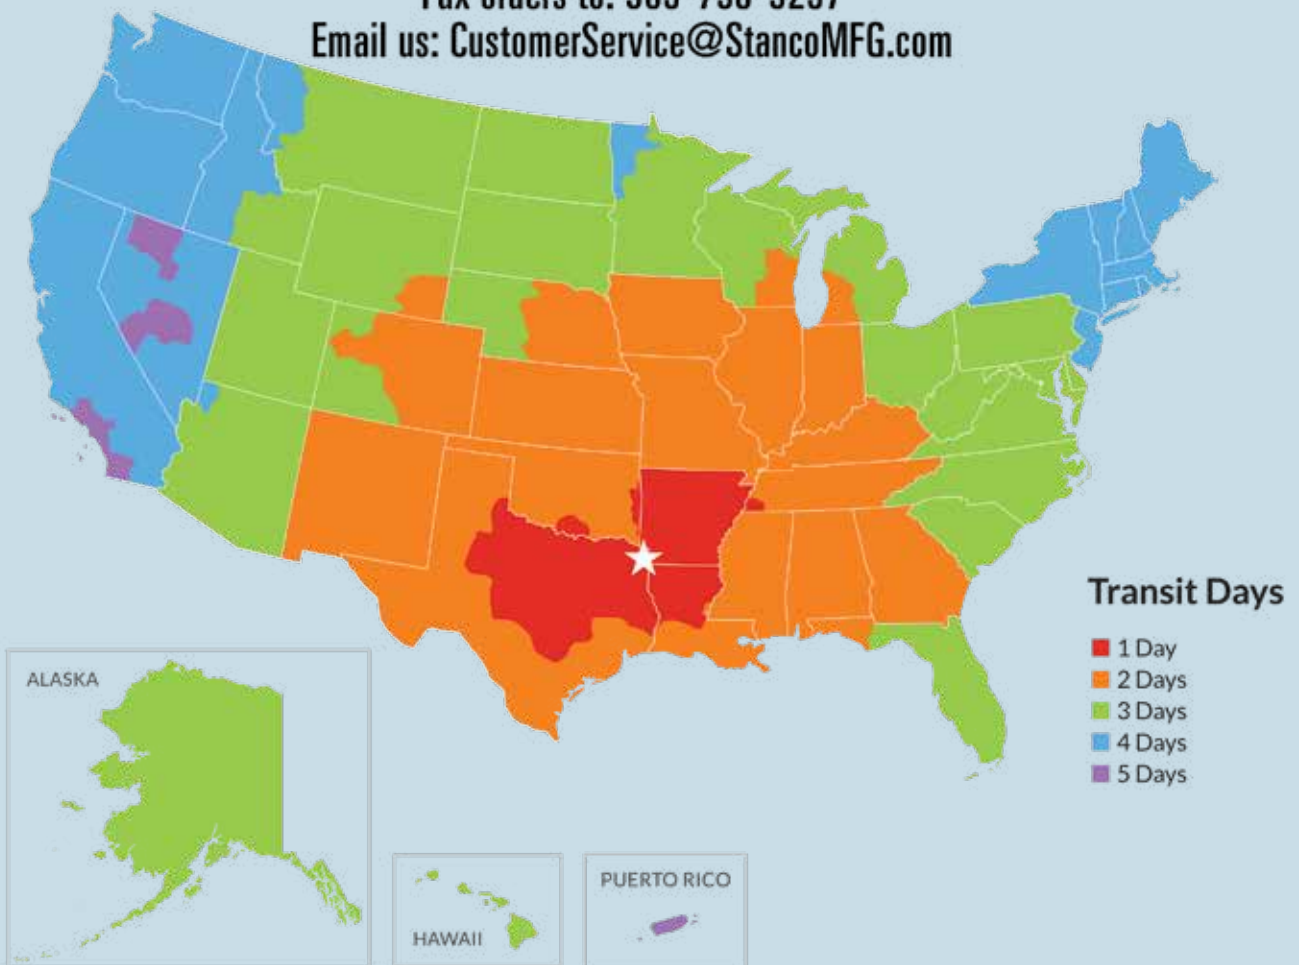

Stanco Welcomes Custom Projects... If We Don't Have What you Need, We'll Make it!



Over 1,000 feet of Leather Cable Cover

Product Customization

We welcome the opportunity to work with you on the development of new products. Send us your specification and/or a sample (if available) and we will design a product to meet your needs. Custom and special items are proprietary and handled in confidence.



Sew-On Labels

Special Printing and Sew-On Labels

Several methods of applying emblems are available: Heat Transfer, Die Embossing, Embroidery and Silk Screen. A variety of sizes and colors are available. Send in your artwork and dimensions for accuracy.




Various Reflective Tape Options

Reflective Tape

Sew-On Reflective Tape for high visibility is available for all garments. Available in a variety of colors and widths. Reflective Tape can be sewn directly on to any garment in any location.

For a correct fit follow these directions

- Always have someone else take the measurements.
- Hold tape straight and snug, but not tight.
- If the measurements fall between two sizes, order the larger size.

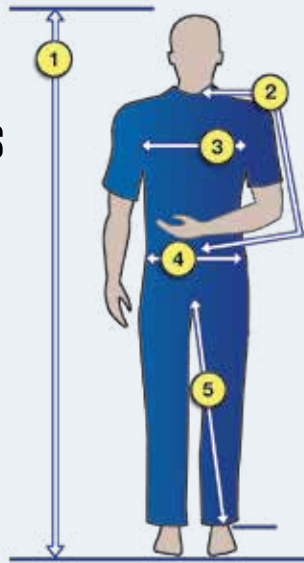


- 1. Height:** Measure the height from the top of your head to ground level beside the feet, without shoes.
- 2. Sleeve:** Measure from the middle of the back of the neck to the elbow point and then to the wrist bone for the correct size.
- 3. Chest:** Measure just under the arms and around the fullest part of the chest.
- 4. Waist:** Measure around the waist (or belt line), and the number of even inches measured is the correct size.
- 5. Inseam:** Measure a pair of well-fitting pants along the inside seam from the crotch to the bottom of the hem.

Coveralls, Bib Overalls, Jackets, Shirts, Cape Sleeves, & Coats


Alpha Size	S	M	L	XL	2XL	3XL	4XL	5XL
Chest Size	34-36"	38-40"	42-44"	46-48"	50-52"	54-56"	58-60"	62-64"
Height	Short = 5'6" and under, Tall = 6'1" - 6'3" (only applies to coveralls & bib overalls)							

Jeans & Pants


Waist sizes: 28-54"
Inseam: 30-36"
Standard Inseam: 32"

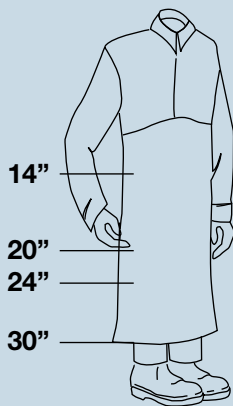


**BIB
LENGTHS**

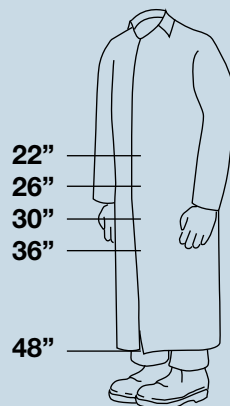

**JACKET / COAT
LENGTHS**

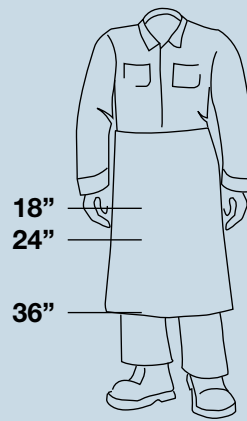

**WAIST APRON
LENGTHS**

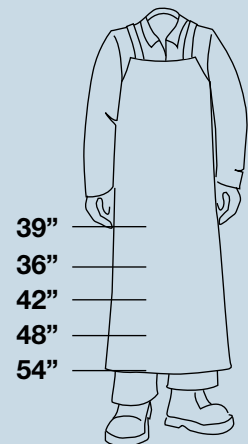

**BIB APRON
LENGTHS**

Today, there are many options for high quality flame-resistant apparel, protective workwear and industrial safety products. Stanco Safety Products brings all these together in one simple package. With manufacturing capabilities in the United States, as well as in Mexico, China, and the Middle East, we can deliver products that match both quality and budget requirements.

We are proud to be a major US provider of flame-resistant workwear, engineered to satisfy the safety certification standards for a wide range of protective apparel and safety accessories.

We also offer contract services, including customized garments and accessories.

Our goal has always been to create long-term relationships with our customers based on the principles of offering quality products at fair prices, a high level of product innovation and excellent customer service. Stanco Safety Products is an excellent partner for any company that has a need for our product mix and a desire to develop a strong and long-lasting relationship with a quality FR workwear provider.

As we celebrate more than 30 years in providing safety work-wear to the industry, we'd like to thank our customers for their business and for their continued loyalty.



Mark E. Stanley
President



Kevin Highland
Vice President

Liability Statement and Disclaimer of Warranties

The products described and illustrated in this catalog and our website are warranted against defects in the manufacturing process only. As all applications vary, a "Use Warranty" is not implied or intended. The buyer should carefully analyze the environment in which the products are to be used to determine if they provide adequate protection.

Privacy Statement

Stanco Manufacturing Inc. manufactures a variety of Flame Resistant Clothing and Personal Protective Equipment (PPE). Our Privacy Statement covers Stanco Manufacturing Inc. and its content.

Return Policy

We will consider the return of products, providing:

- The products are catalog items
- The products are in saleable condition (not soiled or used)
- The products were purchased within a 30-day period of time from the request date

A Return Goods Authorization (RGA) number from a Customer Service Representative must be obtained, and the freight prepaid back to our warehouse. There will also be a 25% re-stocking charge for all authorized returned goods. Custom and special products may not be returned.

Delivery Lead-Time

It is our intention to provide you with accurate lead times. However, if the products you request are needed sooner, our customer service staff will certainly be glad to work with you. We will always commit to firm delivery dates.

"DuPont™ and Nomex® are trademarks or registered trademarks of E.I. du Pont de Nemours and Company."

"DuPont™ and Kevlar® are trademarks or registered trademarks of E.I. du Pont de Nemours and Company."



Proud Member



Stanco Manufacturing, Inc.

2004 W Main Street
Atlanta, TX 75551-3052
903-796-7936 (phone)
903-796-9237 (fax)
1-800-348-1148 (toll-free)
stancomfg.com
customerservice@stancomfg.com

DISTRIBUTED BY:

